






Product Type: Relay module

Product Name: X1S-20PP-1AU

Product Description: 50mm base small relay, 20 MC-DTP/TP terminal input and output, 1 set of normally open contacts, high and low level switching input.

Product Size

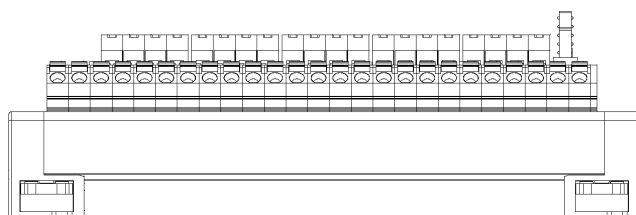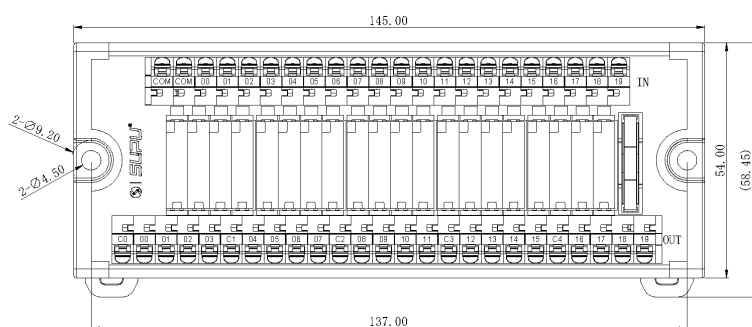

Parameters

 SUPU ID	X1S-20PP-1AU
 Number of connections	20
 Protection Level	IP20

⌘ Operating temperature range	-20°C-+70°C
-------------------------------	-------------

⌘ Mounting Type	DIN rail mounting/screw mounting
-----------------	----------------------------------

Technical data

⌘ Overvoltage category	II
⌘ Degree of pollution	2
⌘ Stripping length	9-10mm
⌘ Cable cross section (AWG)	500VAC/1min
⌘ Insulation Resistance	500MΩ
⌘ Wire Range	28-16AWG
⌘ Coil Current	4.6mA
⌘ Load Current	5A
⌘ Coil Voltage	24V DC

Commercial data

⌘ Order No	X1S-20PP-1AU
⌘ Packing unit	PCS
⌘ Minimum order quantity	5

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Ningbo SUPU Electronics Co., Ltd.

Service Hotline: 400-626-6336



Wechat

Date:2026-02-17 16:25

The right to modify data belongs to SUPU.