


Product Type: IP67 connector

Product Name:ESF-  
RS250A70BB1

Product Description: Connectors suitable for  
energy storage modules: Color: Black Wire cross-  
section: 50 mm<sup>2</sup> to 70 mm<sup>2</sup> Rated voltage: 1500V  
DC Rated current: 250A Connection method: screw  
Contact type: Pin

Product Size

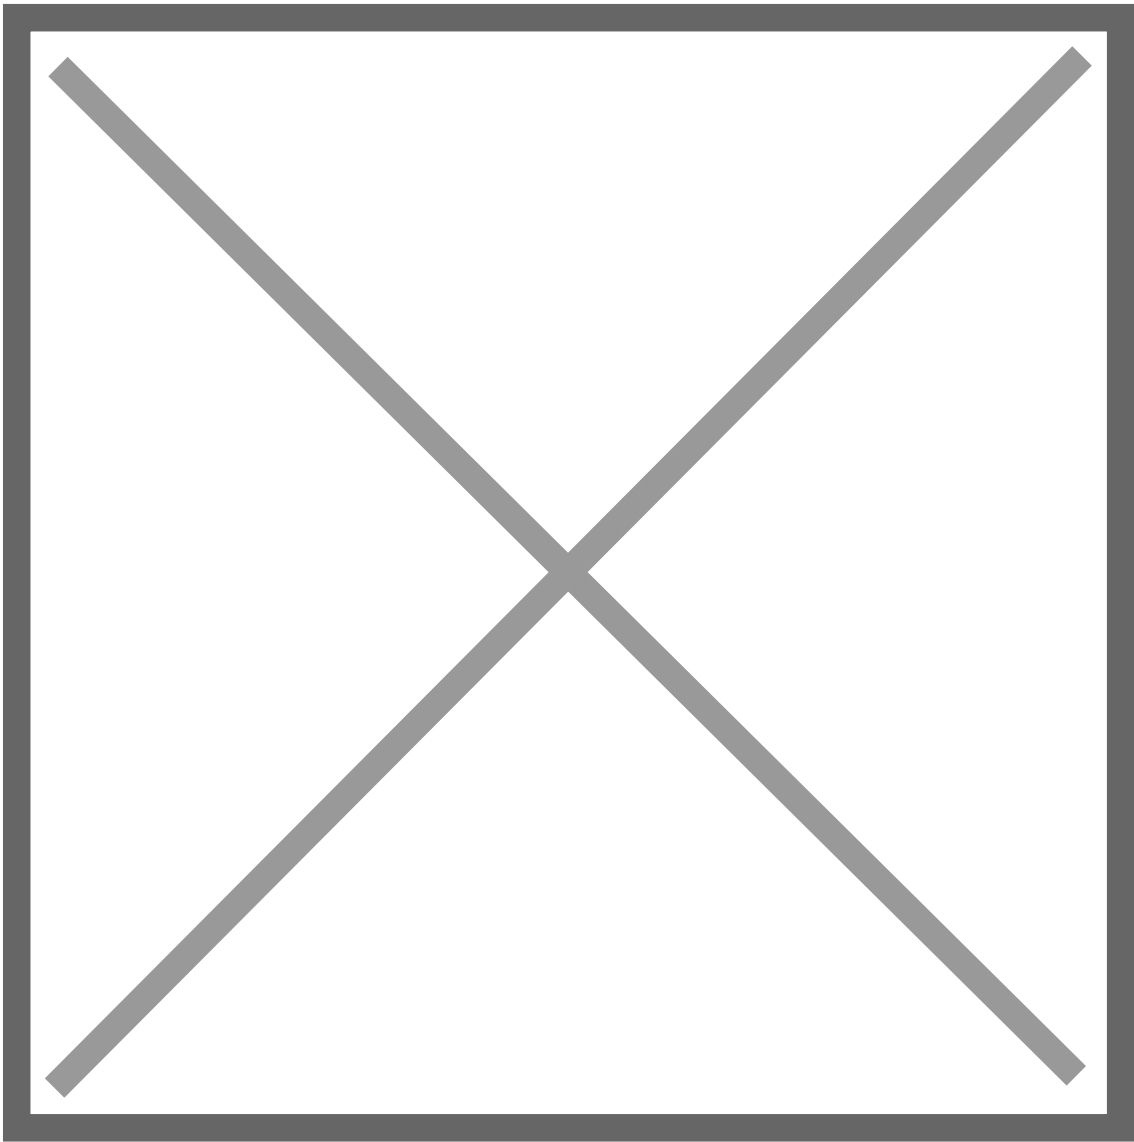

Parameters

⌘ SUPU ID	ESF-RS250A70BB1
⌘ Number of connections	1
⌘ Connection method	Screw thread
⌘ Protection Level	IP 67
⌘ Operating temperature range	-40°C~+125°C
⌘ Insulation material	PA
⌘ Insulation material group	III
⌘ Contact material	Copper alloy

☞ Contact plating	Ag,Plated
☞ Insertion/withdrawal cycles	100
☞ Insertion force	≤75N
☞ Withdrawal force	≥10N

## Technical data

☞ IEC Rated Current	250A
☞ IEC Rated Voltage	1500V DC
☞ Overvoltage category	III
☞ Degree of pollution	3
☞ Rated impulse voltage	12.3KV
☞ UL Rated Current	250A
☞ UL Rated Voltage	1500V DC
☞ Stripping length	/
☞ Rated cross section(AWG)	2/0 AWG
☞ External cable diameter	/

## Commercial data

☞ Order No	ESF-RS250A70BB1
☞ Packing unit	Pcs
☞ Minimum order quantity	1
☞ Single piece weight	50g

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail: [supucontact@supu.cn](mailto:supucontact@supu.cn)

Service Hotline: 400-626-6336



Wechat

---

Date: 2025-12-08 00:27

The right to modify data belongs to SUPU.