


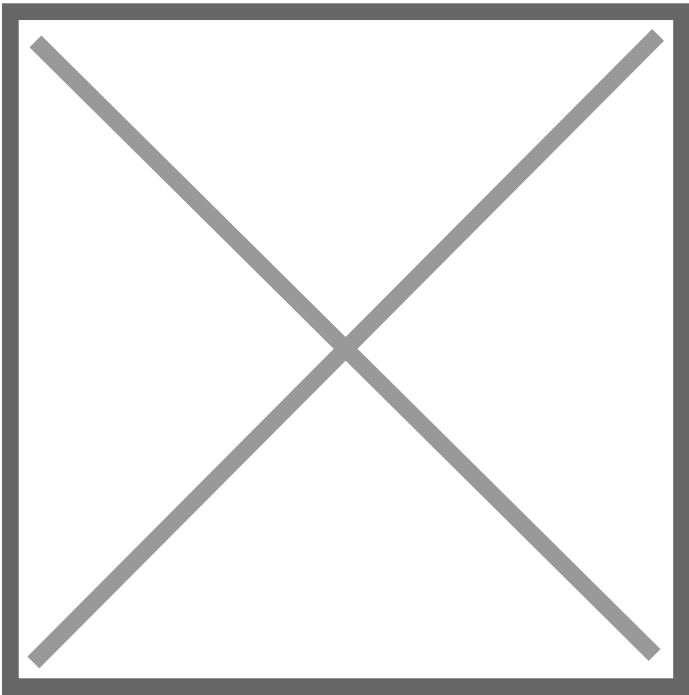

Product Type: Plug-in terminal-Socket

Product Name:MC-PA3.5A17-0002

Product Description: Pitch: 3.5mm Rated Voltage : 160V Rated Current: 8A colour : customizable

Parameters

⌘ SUPU ID	MC-PA3.5A17-0002
⌘ Pitch	3.5
⌘ Number of connections	17
⌘ Connection method	-
⌘ Protection Level	IP20
⌘ Operating temperature range	-40~+105℃
⌘ Insulation material	PA66
⌘ Insulation material group	I
⌘ Contact material	Copper alloy
⌘ Contact plating	Sn,Plated
⌘ Color	Green/Black/Blue/Grey/Orange/Red

Technical data		
⌘ IEC Rated Current		160V
⌘ IEC Rated Voltage		8A
⌘ Overvoltage category		III III II
⌘ Degree of pollution		3 2 2
⌘ Rated impulse voltage		2.5KV 2.5KV 2.5KV
⌘ UL Rated Current		8A - 8A
⌘ UL Rated Voltage		300V - 300V
⌘ Conductor cross section rigid		-
⌘ Conductor cross section flexible		-
⌘ Conductor cross section flexible,with furrule		-
⌘ Locking screw Specification		-
⌘ Locking screw torque		-
⌘ Fixed Screw Specification		-
⌘ Stripping length		-
⌘ Use group		B/C/D

Commercial data		
⌘ Order No		MC-PA3.5A17-0002

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Ningbo SUPU Electronics Co., Ltd.

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat

Date:2025-12-08 09:37

The right to modify data belongs to SUPU.