


Product Type: Push-in spring terminal

Product Name:TPH35-2-GY

Product Description: Connection method:Push in connection,Number of connections:2,Number of levels : 1

Product Size

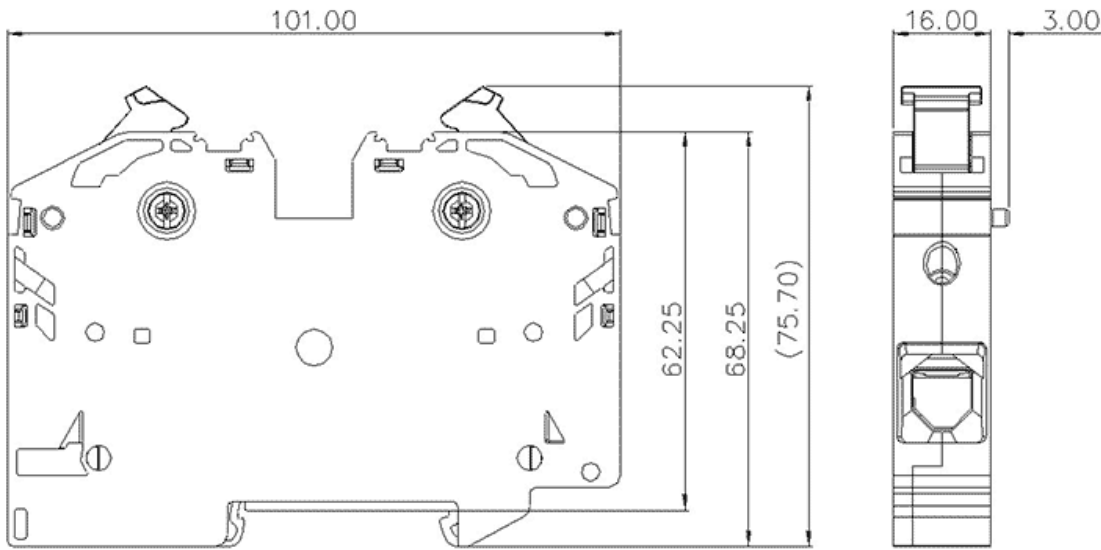

Parameters

⌘ SUPU ID	TPH35-2-GY
⌘ Width	16mm
⌘ Number of levels	1
⌘ Number of connections	2

☞ Connection method	直插弹簧接线
☞ Protection Level	IP20
☞ Insulation material	PA66
☞ Insulation material group	I
☞ Contact material	Copper alloy
☞ Contact plating	Sn,Plated
☞ Ambient temperature (operation)	-40°C~105°C
☞ Ambient temperature (assembly)	-5°C~70°C
☞ Ambient temperature (storage)	-25°C~60°C
☞ Permissible humidity (storage/transport)	30%~70%

Technical data

☞ IEC Rated Current	125A
☞ IEC Rated Voltage	1000V
☞ Overvoltage category	III
☞ Degree of pollution	3
☞ Rated impulse voltage	8KV
☞ UL Rated Current	115A/115A/-
☞ UL Rated Voltage	1000V/1000V/-
☞ Conductor cross section rigid	2.5-35mm ²
☞ Conductor cross section flexible	2.5-35mm ²
☞ Conductor cross section flexible,with ferrule	2.5-35mm ²
☞ Stripping length	25mm
☞ Use group	B/C/D

Commercial data

☞ Order No

TPH35-2-GY

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat