7.5

XX





Product Type: Fixed terminal

Product Name:MC-TC-

F7.5VXXP-0001


Product Description: Pitch:7.5mm Rated

Voltage: 1000V Rated Current:41A Connection

method: Push-in spring connection

colour: customizable

## **Product Size**

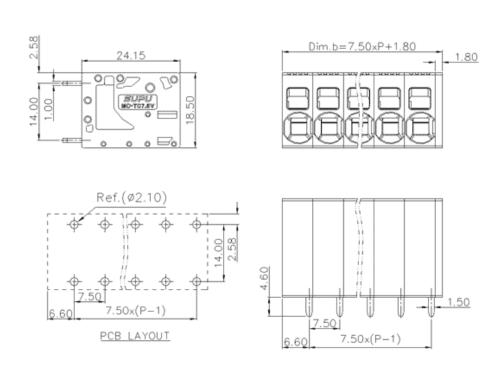

## **Parameters**

**SUPU ID** MC-TC-F7.5VXXP-0001 **88** Pitch

**88** Number of levels Single layer

**%** Number of connections

Se Connection method	Push in spring connection
Se Protection Level	IP20
SS Operating temperature range	-40~+105°C
S Insulation material	PA66
88 Insulation material group	I
86 Contact material	Copper alloy
86 Contact plating	Sn,Plated
88 Color	Green/Black/Blue/Grey/Orange/Red
Technical data	
88 IEC Rated Current	41A
SE IEC Rated Voltage	1000V
₩ Overvoltage category	111/111/11
Regree of pollution	322
Rated impulse voltage	6.0KV 6.0KV 6.0KV
88 UL Rated Current	36A 36A 5A
88 UL Rated Voltage	300V 150V 600V
88 Conductor cross section rigid	0.2~10mm²
88 Conductor cross section flexible	0.2~10mm²
88 Conductor cross section flexible, with furrule	0.2~10mm²
88 Locking screw Specification	-
88 Locking screw torque	-
Rixed Screw Specification	-
Stripping length	13-15mm

₩C-TC-F7.5VXXP-0001

## Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn Service Hotline: 400-626-6336



Wechat

Date:2025-07-17 19:00

The right to modify data belongs to SUPU.