


Product Type: Screw terminal

**Product Name: TU4-4-GY**

Product Description: Connection method: Screw connection, IEC Rated current: 32A, IEC Rated Voltage: 800V, Number of connections: 4, Number of levels : 1, Rated cross section: 26-10AWG

Product Size

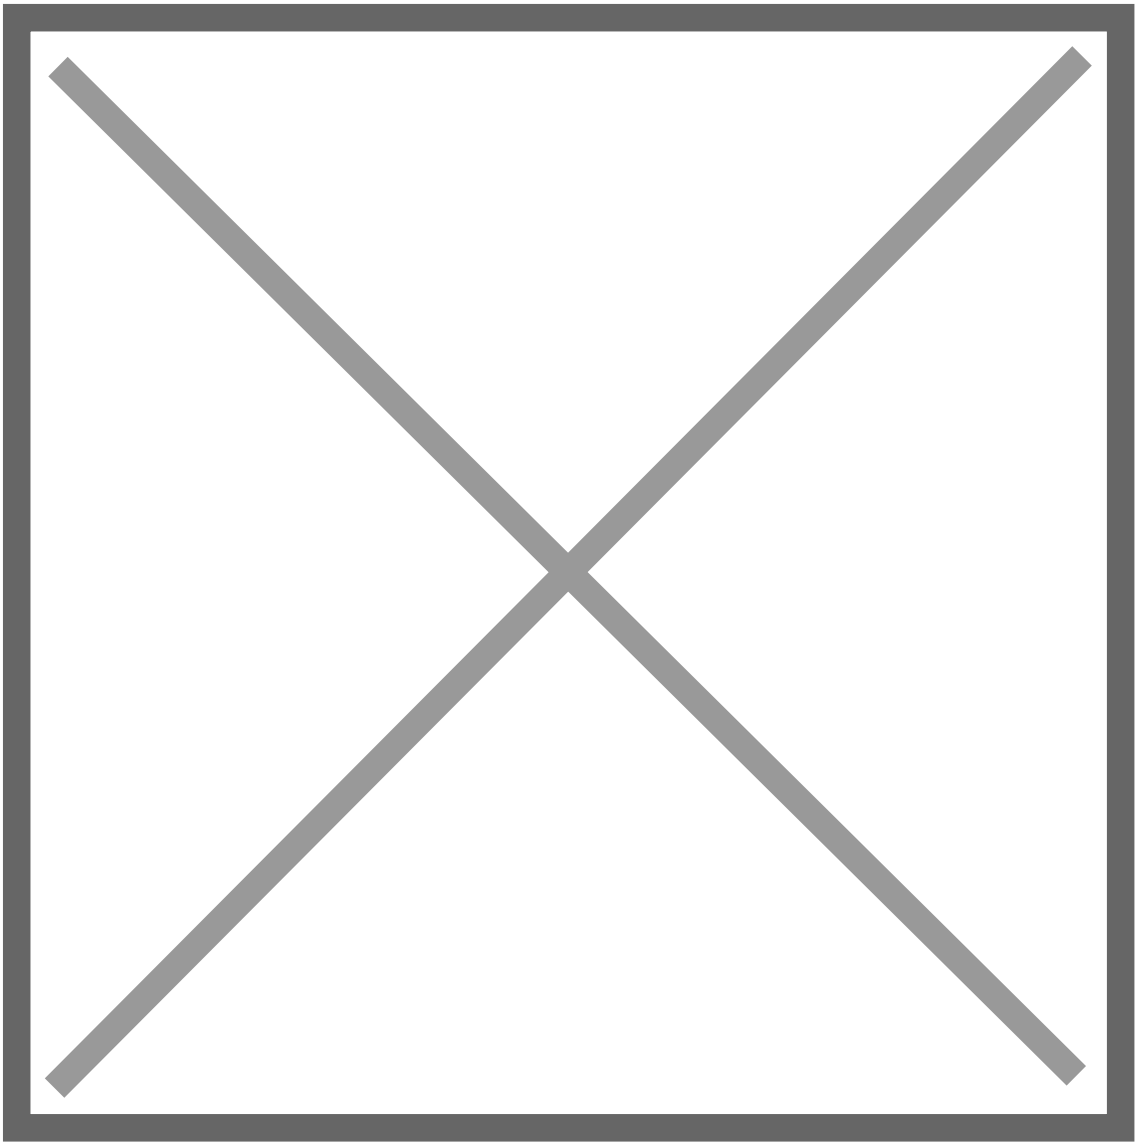

Parameters

⌘ SUPU ID	TU4-4-GY	
⌘ Width	6.2mm	
⌘ Number of levels	1	
⌘ Number of connections	4	
⌘ Connection method	Screw connection	
⌘ Protection Level	IP20	
⌘ Insulation material	PA66	
⌘ Insulation material group	I	

☞ Contact material	Copper alloy
☞ Contact plating	Sn,Plated
☞ Ambient temperature (operation)	-40°C~105°C
☞ Ambient temperature (assembly)	-5°C~70°C
☞ Ambient temperature (storage)	-25°C~60°C
☞ Permissible humidity (storage/transport)	30%~70%
☞ Product type	Terminal block of side-entry

## Technical data

☞ IEC Rated Current	32A
☞ IEC Rated Voltage	800V
☞ Overvoltage category	III
☞ Degree of pollution	3
☞ Rated impulse voltage	8kV
☞ UL Rated Current	30/30/5A
☞ UL Rated Voltage	300/300/600V
☞ Conductor cross section rigid	0.2-6mm <sup>2</sup>
☞ Conductor cross section flexible	0.2-4mm <sup>2</sup>
☞ Conductor cross section flexible,with furrule	0.2-4mm <sup>2</sup>
☞ Locking screw Specification	M3
☞ Locking screw torque	0.5N.m
☞ Fixed Screw Specification	/
☞ 固定螺钉扭矩	/
☞ Stripping length	9mm

☞ Use group	B/C/D
☞ Rated cross section	26-10AWG
☞ UL Rated Current	30/30/5A
☞ UL Rated Current	300/300/600V

## Commercial data

☞ Order No	TU4-4-GY
------------	----------

### Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat