


Product Type: Screw terminal

Product Name: TU4-FUSE-BK

Product Description: Connection method: Screw connection, IEC Rated current: 6.3A, IEC Rated Voltage: 500V, Number of connections: 2, Number of levels : 1, Rated cross section: 26-10AWG

Product Size

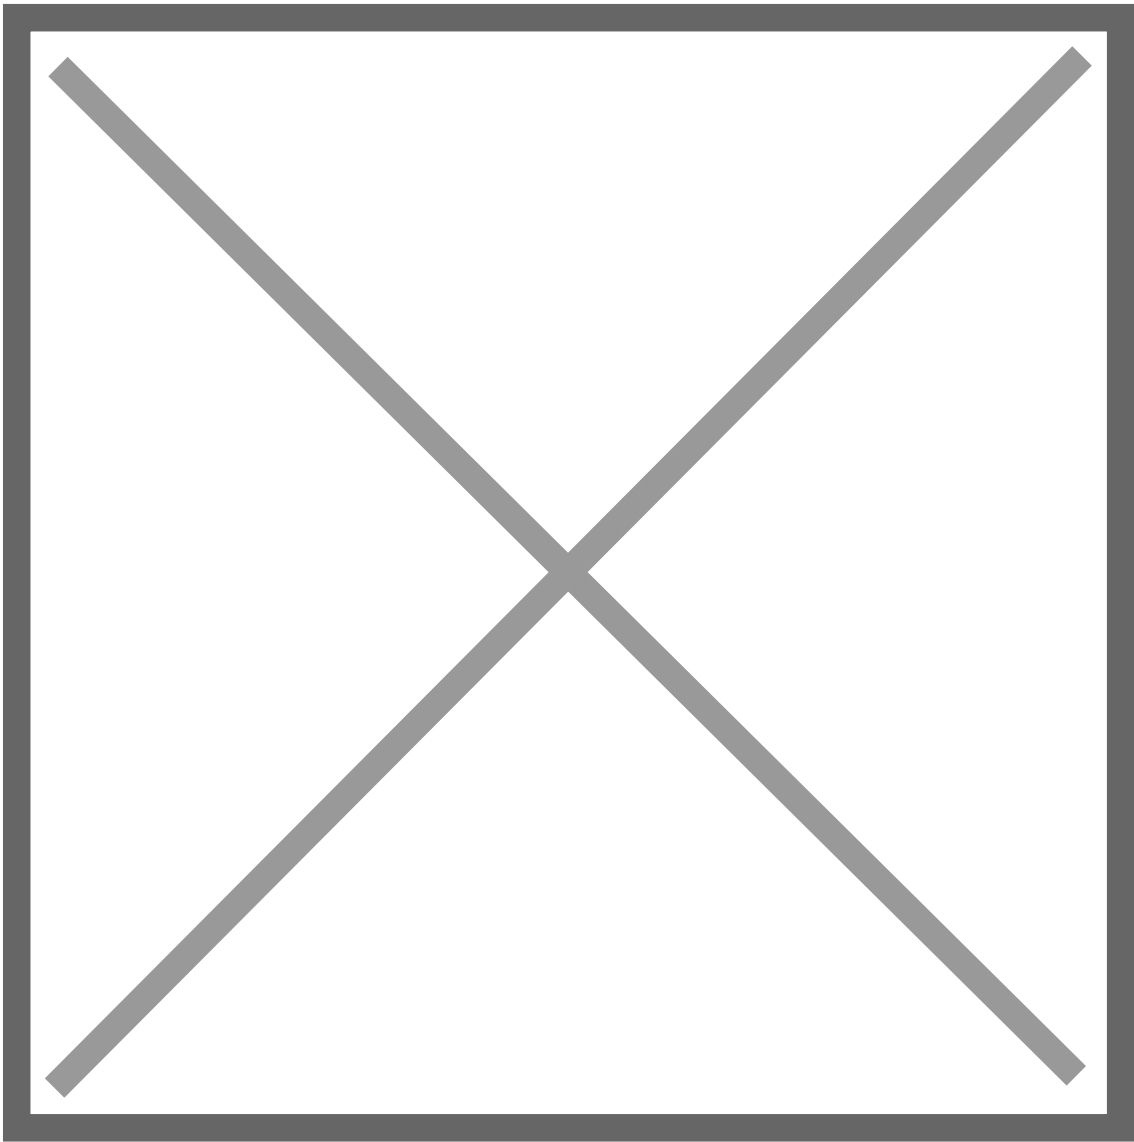

Parameters

⌘ SUPU ID	TU4-FUSE-BK	
⌘ Width	6.2mm	
⌘ Number of levels	1	
⌘ Number of connections	2	
⌘ Connection method	Screw connection	
⌘ Protection Level	IP20	
⌘ Insulation material	PA66	
⌘ Insulation material group	I	

☞ Contact material	Copper alloy
☞ Contact plating	Sn,Plated
☞ Ambient temperature (operation)	-40℃~105℃
☞ Ambient temperature (assembly)	-5℃~70℃
☞ Ambient temperature (storage)	-25℃~60℃
☞ Permissible humidity (storage/transport)	30%~70%
☞ Product type	Terminal block with fuse

Technical data

☞ IEC Rated Current	6.3A
☞ IEC Rated Voltage	500V
☞ Overvoltage category	III
☞ Degree of pollution	3
☞ Rated impulse voltage	6kV
☞ UL Rated Current	6.3A
☞ UL Rated Voltage	600V
☞ Conductor cross section rigid	0.2-6mm ²
☞ Conductor cross section flexible	0.2-4mm ²
☞ Conductor cross section flexible,with furrule	0.2-4mm ²
☞ Locking screw Specification	M3
☞ Locking screw torque	0.8N.m
☞ Fixed Screw Specification	/
☞ 固定螺钉扭矩	/
☞ Stripping length	9mm

⌘ Use group	B/C
⌘ Rated cross section	26-10AWG
⌘ UL Rated Current	6.3A
⌘ UL Rated Current	600V

Commercial data

⌘ Order No	TU4-FUSE-BK
------------	-------------

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat