


Product Type: Screw terminal

**Product Name:335993**

Product Description: Connection method:Screw connection,IEC Rated current:/,IEC Rated Voltage:1000V,Number of connections:2,Number of levels : 1,Rated cross section:8-1/0AWG

Product Size

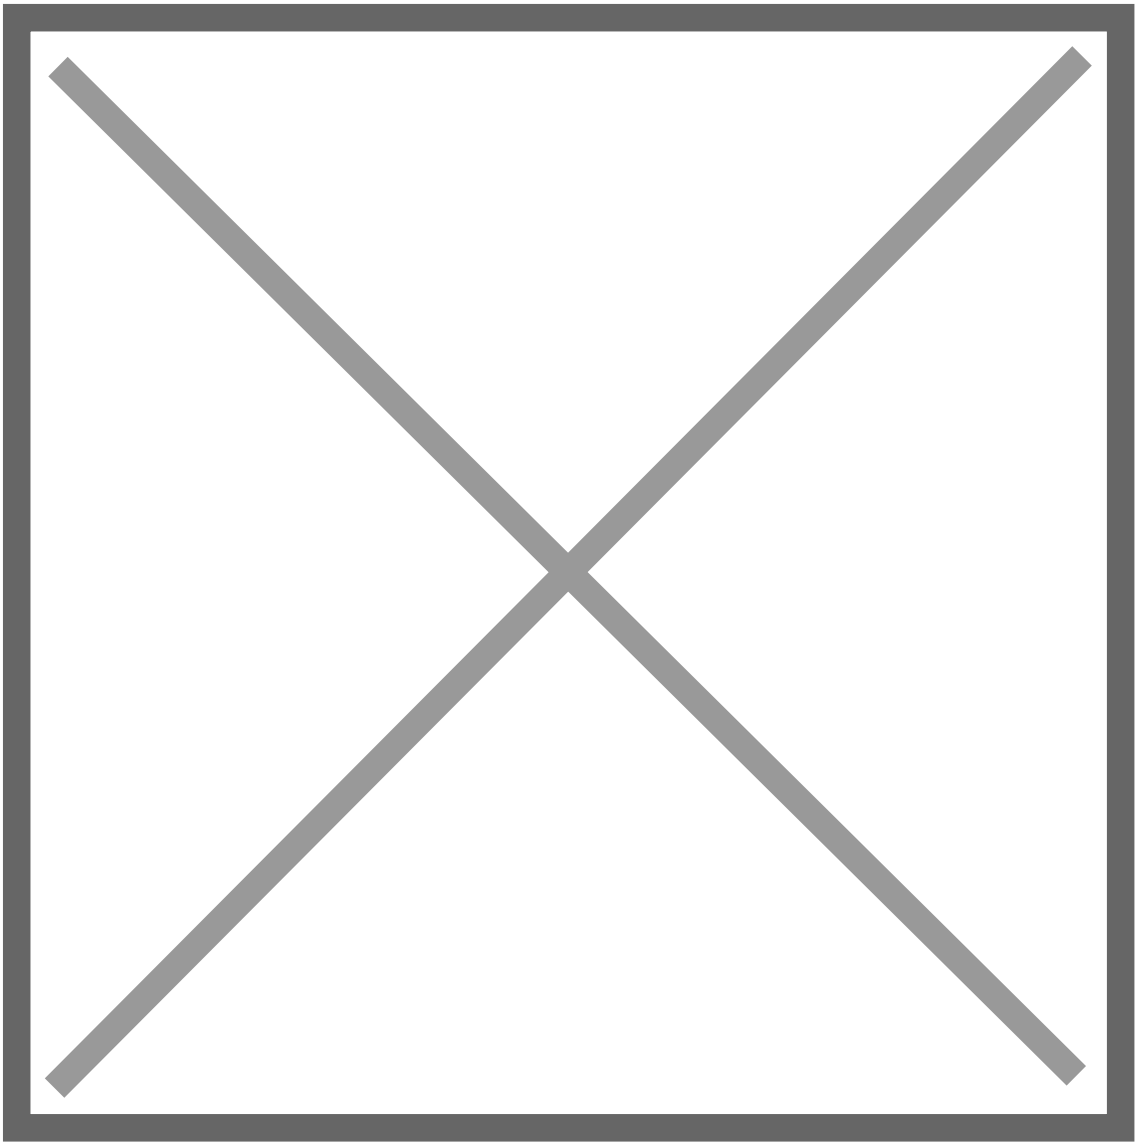

Parameters

⌘ SUPU ID	335993
⌘ Width	16mm
⌘ Number of levels	1
⌘ Number of connections	2
⌘ Connection method	Screw connection
⌘ Protection Level	IP20
⌘ Insulation material	PA66
⌘ Insulation material group	I

☞ Contact material	Copper
☞ Contact plating	Sn,Plated
☞ Ambient temperature (operation)	-40℃~105℃
☞ Ambient temperature (assembly)	-5℃~70℃
☞ Ambient temperature (storage)	-25℃~60℃
☞ Permissible humidity (storage/transport)	30%~70%
☞ Product type	Ground terminal

### Technical data

☞ IEC Rated Current	/
☞ IEC Rated Voltage	1000V
☞ Overvoltage category	III
☞ Degree of pollution	3
☞ Rated impulse voltage	8kV
☞ UL Rated Current	/
☞ UL Rated Voltage	600V
☞ Conductor cross section rigid	0.5-35mm <sup>2</sup>
☞ Conductor cross section flexible	0.5-35mm <sup>2</sup>
☞ Conductor cross section flexible,with furrule	0.75-35mm <sup>2</sup>
☞ Locking screw Specification	M6
☞ Locking screw torque	3-3.5N.m
☞ Fixed Screw Specification	/
☞ 固定螺钉扭矩	/
☞ Stripping length	16-17mm

☞ Use group	B/C
☞ Rated cross section	8-1/0AWG
☞ UL Rated Current	/
☞ UL Rated Current	600V

Commercial data

☞ Order No	335993
------------	--------

Ningbo SUPU Electronics Co., Ltd.  
 Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
 Cixi City, Zhejiang Province, China  
 Zip code: 315303  
 Switchboard: +86 574-63288158  
 Fax: +86 574-63288170  
 E-mail:supucontact@supu.cn  
 Service Hotline: 400-626-6336



Wechat