


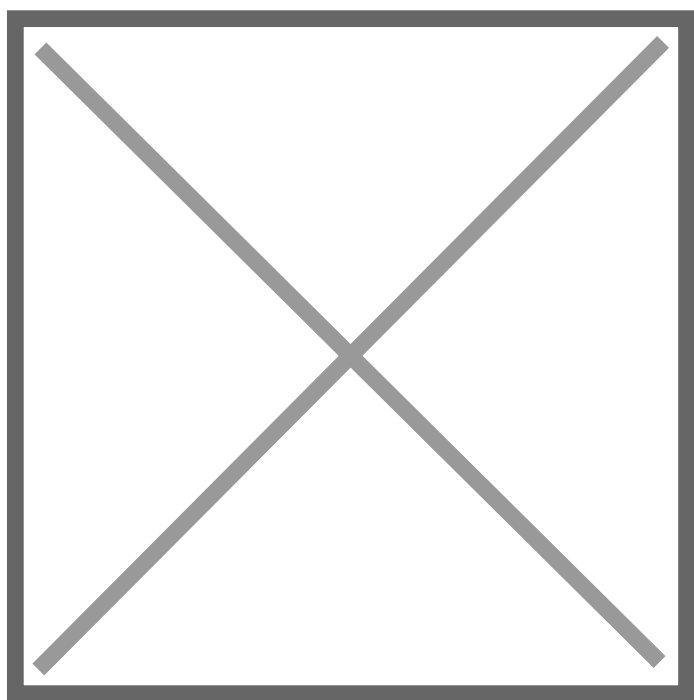


Product Type: Screw terminal

Product Name:306981

Product Description: Connection method:Screw connection,IEC Rated current:41A,IEC Rated Voltage:2000V,Number of connections:2,Number of levels : 1,Rated cross section:26-8AWG

Product Size

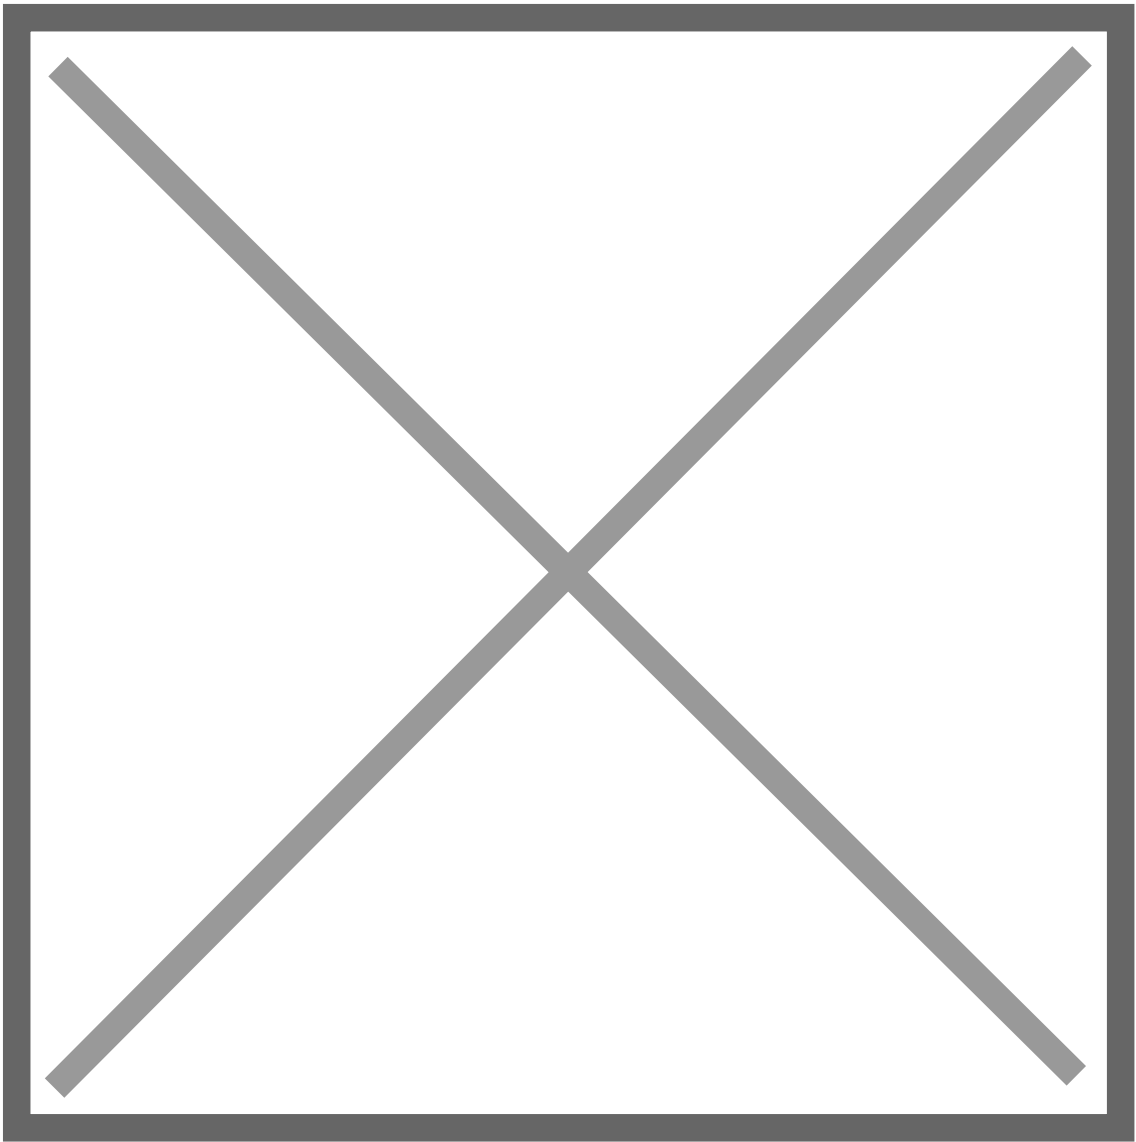

Parameters

⌘ SUPU ID	306981
⌘ Width	10.1mm
⌘ Number of levels	1
⌘ Number of connections	2
⌘ Connection method	Screw connection
⌘ Protection Level	IP20
⌘ Insulation material	PA66
⌘ Insulation material group	I

☞ Contact material	Copper alloy
☞ Contact plating	Ni,Plated
☞ Ambient temperature (operation)	-40℃~105℃
☞ Ambient temperature (assembly)	-5℃~70℃
☞ Ambient temperature (storage)	-25℃~60℃
☞ Permissible humidity (storage/transport)	30%~70%
☞ Product type	Terminal block of side-entry

Technical data

☞ IEC Rated Current	41A
☞ IEC Rated Voltage	2000V
☞ Overvoltage category	III
☞ Degree of pollution	3
☞ Rated impulse voltage	12KV
☞ UL Rated Current	50A/50A/50A/50A
☞ UL Rated Voltage	600V/600V/1000V/1000V
☞ Conductor cross section rigid	0.5-10mm ²
☞ Conductor cross section flexible	0.5-6mm ²
☞ Conductor cross section flexible,with furrule	0.5-6mm ²
☞ Locking screw Specification	M4
☞ Locking screw torque	1.5N·m
☞ Fixed Screw Specification	/
☞ 固定螺钉扭矩	/
☞ Stripping length	15mm

☞ Use group	B/C/E/F
☞ Rated cross section	26-8AWG
☞ UL Rated Current	50A/50A/50A/50A
☞ UL Rated Current	600V/600V/1000V/1000V

Commercial data

☞ Order No	306981
------------	--------

Ningbo SUPU Electronics Co., Ltd.
 Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
 Cixi City, Zhejiang Province, China
 Zip code: 315303
 Switchboard: +86 574-63288158
 Fax: +86 574-63288170
 E-mail:supucontact@supu.cn
 Service Hotline: 400-626-6336



Wechat