





Product Type: IP67 connector

Product Name: ESF-RS200A50YB2-AQ

Product Description:

## Product Size

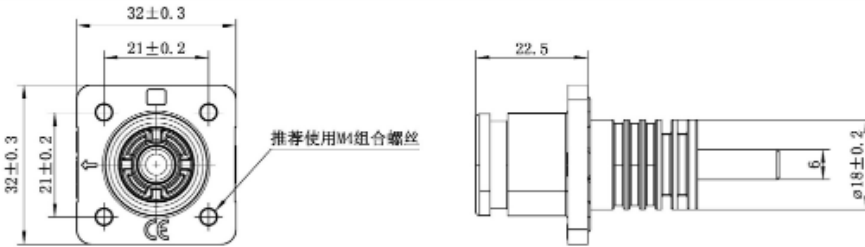

插座除键槽及类型标识不同外，其它结构均相同

订货号	物料名称	插座键槽	coding	备注
ESF-RS200A50YB2	ESF-RS200A50YB2 插座		无	橙色
ESF-RS200A50BB2	ESF-RS200A50BB2 插座			黑色
ESF-RS200A50YB2-AQ	ESF-RS200A50YB2-AQ 插座		A: 20° Q: 90°	橙色
ESF-RS200A50BB2-AQ	ESF-RS200A50BB2-AQ 插座			黑色
ESF-RS200A50YB2-BS	ESF-RS200A50YB2-BS 插座		B: 30° S: 180°	橙色
ESF-RS200A50BB2-BS	ESF-RS200A50BB2-BS 插座			黑色

## Parameters

☞ SUPU ID

ESF-RS200A50YB2-AQ

☞ Number of connections

1

☞ Connection method

Screw thread

☞ Protection Level

IP67

☞ Operating temperature range	-40°C~125°C
☞ Insulation material	PA
☞ Insulation material group	III
☞ Contact material	Copper alloy
☞ Contact plating	Ag,Plated
☞ Insertion/withdrawal cycles	100
☞ Insertion force	≤75N
☞ Withdrawal force	≥10N

## Technical data

☞ IEC Rated Current	200A
☞ IEC Rated Voltage	1500V
☞ Overvoltage category	III
☞ Degree of pollution	3
☞ Rated impulse voltage	12.3KV
☞ UL Rated Current	50mm <sup>2</sup> (AWG1/0)
☞ UL Rated Voltage	Positive
☞ Stripping length	/
☞ Rated cross section	50mm <sup>2</sup> (AWG1/0)
☞ Rated cross section(AWG)	50mm <sup>2</sup> (AWG1/0) 35mm <sup>2</sup> (AWG2)
☞ External cable diameter	/

## Commercial data

☞ Order No	ESF-RS200A50YB2-AQ
------------	--------------------

☞ Packing unit	1
☞ Minimum order quantity	PCS
☞ Weight per unit (without packaging)	0.047KG
☞ Single piece weight	0.045KG

## Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat