


Product Type: Barrier terminal

Product Name: TBR100-13C-LR-001

Product Description: pitch : 25.0mm, rated voltage UL600V, rated current UL101A, color: black, Rated cross section 20-2AWG

Product Size

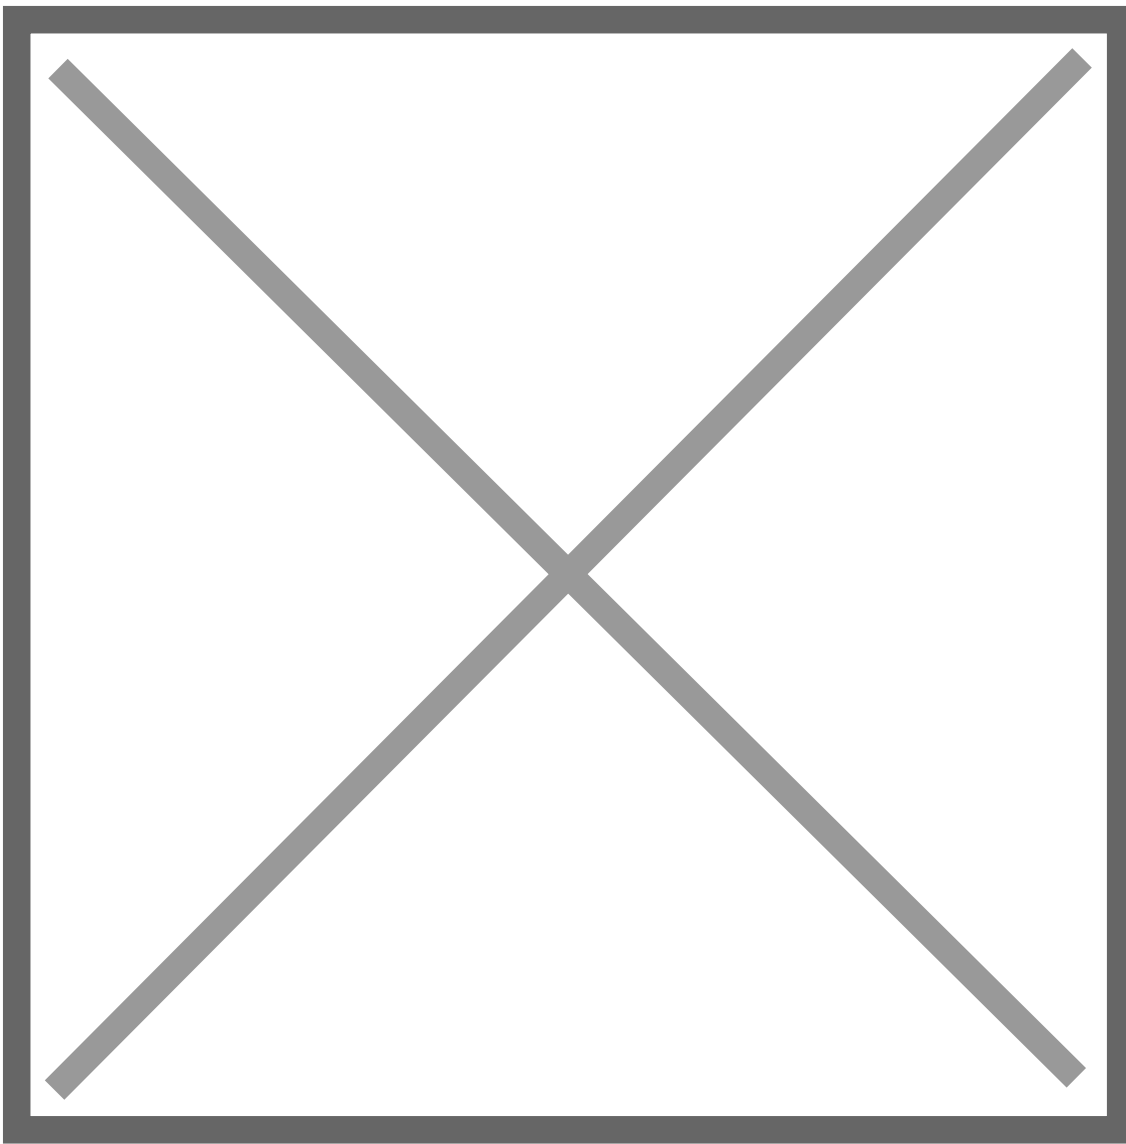

## Parameters

☞ SUPU ID	TBR100-13C-LR-001
☞ Pitch	25
☞ Number of levels	single layer
☞ Number of connections	26
☞ Connection method	Screw connection
☞ Protection Level	IP20
☞ Operating temperature range	-40°C ~+125°C
☞ Insulation material	PC

☞ Insulation material group	III
☞ Contact material	Copper alloy
☞ Contact plating	Sn plated

## Technical data

☞ IEC Rated Current	101/101/101
☞ IEC Rated Voltage	1000/1000/1000
☞ Overvoltage category	III/III/II
☞ Degree of pollution	3/2/2
☞ Rated impulse voltage	/
☞ Conductor cross section rigid	0.5-35
☞ Stripping length	13-14
☞ Tightening torque	40
☞ Connection capacity AWG	20-2
☞ UL Rated Current	101/101/101
☞ UL Rated Current	1000/1000/1000

## Commercial data

☞ Order No	TBR100-13C-LR-001
------------	-------------------

### Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Ningbo SUPU Electronics Co., Ltd.

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat

---

Date:2025-10-15 01:04

The right to modify data belongs to SUPU.