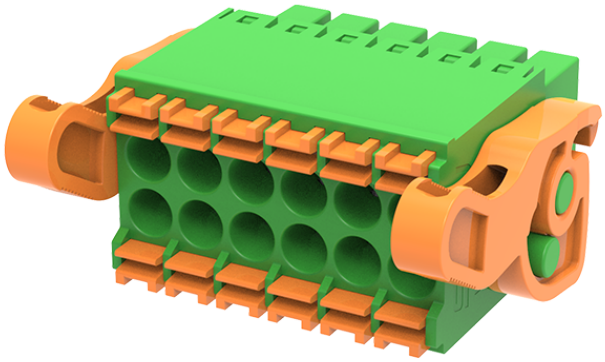

Product Type: Plug-in terminal-Plug

Product Name:MC-DRT3.5H14P-I-0001

Product Description: Pitch:3.5mm Rated Voltage：150V Rated Current:8A Connection method：Push in connection colour：customizable

Product Size

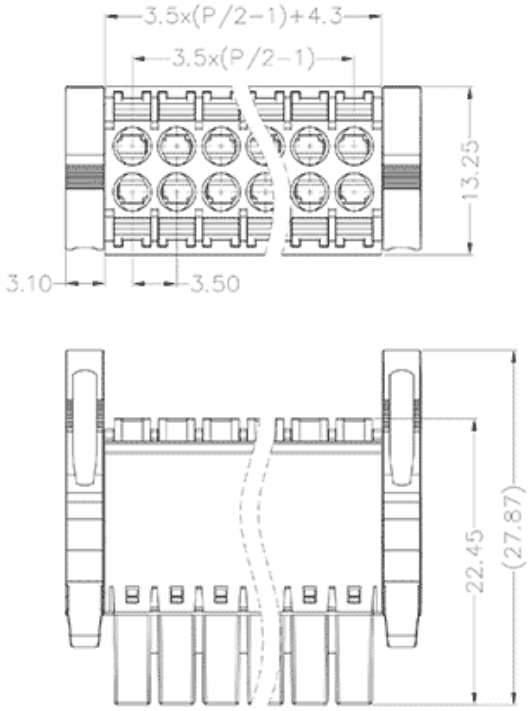

Parameters

SUPU ID	MC-DRT3.5H14P-I-0001
Pitch	3.5
Number of levels	double-layer
Number of connections	14

Connection method	Push in connection
Protection Level	IP20
Operating temperature range	-40~+105°C
Insulation material	PA66
Insulation material group	I
Contact material	Copper alloy
Contact plating	Sn,Plated
Color	Green/Black/Blue/Grey/Orange/Red

Technical data

IEC Rated Current	8A
IEC Rated Voltage	150V
Overvoltage category	III/III/ II
Degree of pollution	3 2 2
Rated impulse voltage	2.5KV 2.5KV 2.5KV
UL Rated Current	8A 8A 8A
UL Rated Voltage	150V 150V 150V
Conductor cross section rigid	0.2-1.5mm²
Conductor cross section flexible	0.2-1.5mm²
Conductor cross section flexible,with furrule	0.2-1.5mm²
Locking screw Specification	-
Locking screw torque	-
Fixed Screw Specification	-
固定螺钉扭矩	-

Stripping length	9-10mm
Use group	B/C/D
Rated cross section	24~16AWG

Commercial data

Order No	MC-DRT3.5H14P-I-0001

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336

Wechat

The right to modify data belongs to SUPU.