


Product Name:MC-PD5.08H02-F-0001

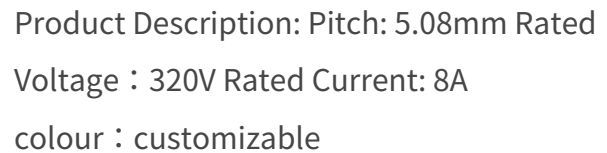

3.50±0.30

7.25

8.00

9.20

4.50

5.08

7.10

Dim.a=5.08x(P-1)

Dim.b=5.08xP+9.12

0.80

Dim.b=5.08xP+9.12

Dim.a=5.08x(P-1)

2.10

4.50

5.08

7.10

2.40

8.00

9.20

1.20

PCB LAYOUT

SUPU ID	MC-PD5.08H02-F-0001
Pitch	5.08
Number of levels	Single layer
Number of connections	2

☞ Connection method	-
☞ Protection Level	IP20
☞ Operating temperature range	-40~+105°C
☞ Insulation material	PA66
☞ Insulation material group	I
☞ Contact material	Copper alloy
☞ Contact plating	Sn,Plated
☞ Color	Green/Black/Blue/Grey/Orange/Red

Technical data

☞ IEC Rated Current	320V
☞ IEC Rated Voltage	8A
☞ Overvoltage category	III III II
☞ Degree of pollution	3 2 2
☞ Rated impulse voltage	4.0KV 4.0KV 4.0KV
☞ UL Rated Current	8A - 8A
☞ UL Rated Voltage	300V - 300V
☞ Use group	B/C/D

Commercial data

☞ Order No	MC-PD5.08H02-F-0001
------------	---------------------

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat

Date:2025-11-22 14:39

The right to modify data belongs to SUPU.