




Product Type: Screw terminal

Product Name: TU95-2-GY

Product Description: Connection method: Screw connection, IEC Rated current: 232A, IEC Rated Voltage: 1000V, Number of connections: 2, Number of levels : 1, Rated cross section: 2-4/0AWG

Product Size

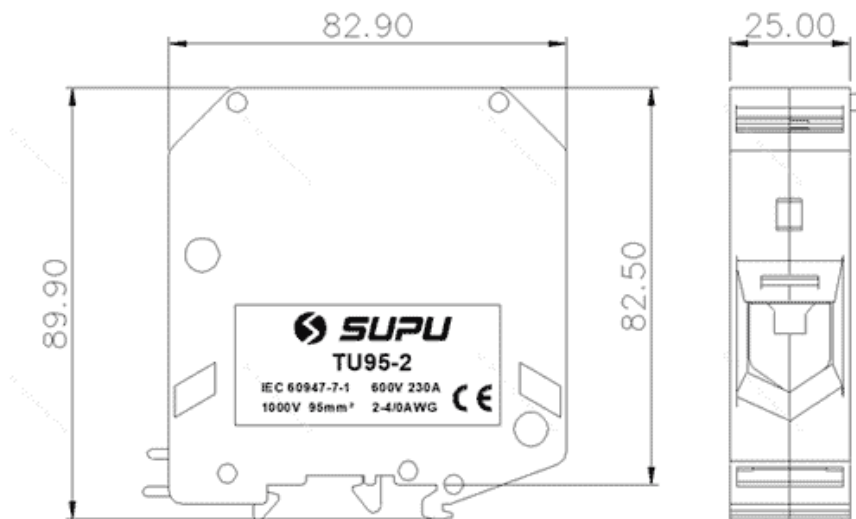

Parameters

<input checked="" type="checkbox"/> SUPU ID	TU95-2-GY
<input checked="" type="checkbox"/> Width	25mm
<input checked="" type="checkbox"/> Number of levels	1
<input checked="" type="checkbox"/> Number of connections	2

<input type="checkbox"/> Connection method	Screw connection
<input type="checkbox"/> Protection Level	IP20
<input type="checkbox"/> Insulation material	PA66
<input type="checkbox"/> Insulation material group	I
<input type="checkbox"/> Contact material	Copper alloy
<input type="checkbox"/> Contact plating	Sn,Plated
<input type="checkbox"/> Ambient temperature (operation)	-40°C~105°C
<input type="checkbox"/> Ambient temperature (assembly)	-5°C~70°C
<input type="checkbox"/> Ambient temperature (storage)	-25°C~60°C
<input type="checkbox"/> Permissible humidity (storage/transport)	30%~70%
<input type="checkbox"/> Product type	Terminal block of side-entry

Technical data

<input type="checkbox"/> IEC Rated Current	232A
<input type="checkbox"/> IEC Rated Voltage	1000V
<input type="checkbox"/> Overvoltage category	III
<input type="checkbox"/> Degree of pollution	3
<input type="checkbox"/> Rated impulse voltage	8kV
<input type="checkbox"/> UL Rated Current	230A
<input type="checkbox"/> UL Rated Voltage	600V
<input type="checkbox"/> Conductor cross section rigid	25-95mm ²
<input type="checkbox"/> Conductor cross section flexible	35-70mm ²
<input type="checkbox"/> Conductor cross section flexible,with furrule	25-95mm ²
<input type="checkbox"/> Locking screw Specification	M8(hexagonal)

<input type="checkbox"/> Locking screw torque	15-18N.m
<input type="checkbox"/> Fixed Screw Specification	/
<input type="checkbox"/> 固定螺钉扭矩	/
<input type="checkbox"/> Stripping length	33mm
<input type="checkbox"/> Use group	B/C
<input type="checkbox"/> Rated cross section	2-4/0AWG
<input type="checkbox"/> UL Rated Current	230A
<input type="checkbox"/> UL Rated Current	600V

Commercial data

<input type="checkbox"/> Order No	TU95-2-GY
-----------------------------------	-----------

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Date:2026-05-04 10:37

The right to modify data belongs to SUPU.