


Product Type: Screw terminal

Product Name:306981

Product Description: Connection method:Screw connection,IEC Rated current:41A,IEC Rated Voltage:2000V,Number of connections:2,Number of levels : 1,Rated cross section:26-8AWG

Product Size

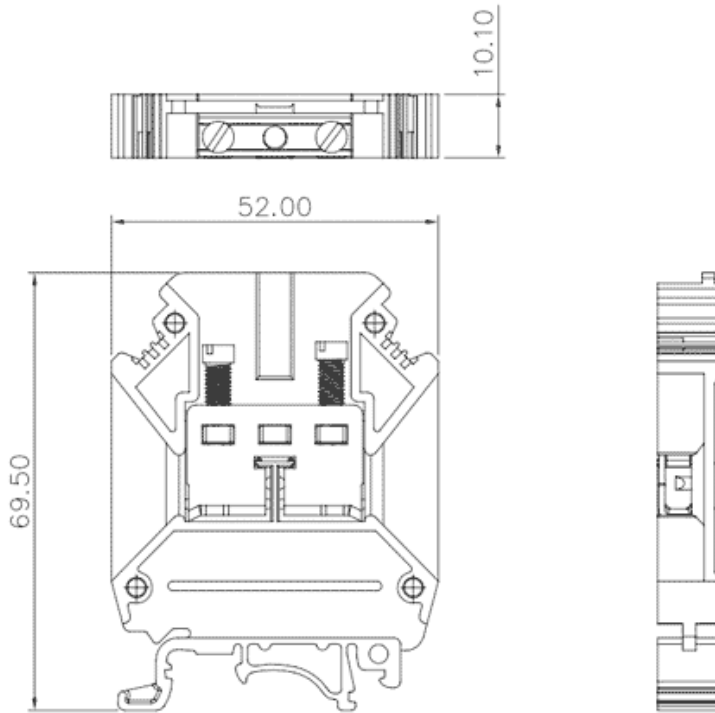

Parameters

<input checked="" type="checkbox"/> SUPU ID	306981
<input checked="" type="checkbox"/> Width	10.1mm
<input checked="" type="checkbox"/> Number of levels	1
<input checked="" type="checkbox"/> Number of connections	2

<input type="checkbox"/> Connection method	Screw connection
<input type="checkbox"/> Protection Level	IP20
<input type="checkbox"/> Insulation material	PA66
<input type="checkbox"/> Insulation material group	I
<input type="checkbox"/> Contact material	Copper alloy
<input type="checkbox"/> Contact plating	Ni,Plated
<input type="checkbox"/> Ambient temperature (operation)	-40°C~105°C
<input type="checkbox"/> Ambient temperature (assembly)	-5°C~70°C
<input type="checkbox"/> Ambient temperature (storage)	-25°C~60°C
<input type="checkbox"/> Permissible humidity (storage/transport)	30%~70%
<input type="checkbox"/> Product type	Terminal block of side-entry

Technical data

<input type="checkbox"/> IEC Rated Current	41A
<input type="checkbox"/> IEC Rated Voltage	2000V
<input type="checkbox"/> Overvoltage category	III
<input type="checkbox"/> Degree of pollution	3
<input type="checkbox"/> Rated impulse voltage	12KV
<input type="checkbox"/> UL Rated Current	50A/50A/50A/50A
<input type="checkbox"/> UL Rated Voltage	600V/600V/1000V/1000V
<input type="checkbox"/> Conductor cross section rigid	0.5-10mm ²
<input type="checkbox"/> Conductor cross section flexible	0.5-6mm ²
<input type="checkbox"/> Conductor cross section flexible,with ferrule	0.5-6mm ²
<input type="checkbox"/> Locking screw Specification	M4

<input type="checkbox"/> Locking screw torque	1.5N·m
<input type="checkbox"/> Fixed Screw Specification	/
<input type="checkbox"/> 固定螺钉扭矩	/
<input type="checkbox"/> Stripping length	15mm
<input type="checkbox"/> Use group	B/C/E/F
<input type="checkbox"/> Rated cross section	26-8AWG
<input type="checkbox"/> UL Rated Current	50A/50A/50A/50A
<input type="checkbox"/> UL Rated Current	600V/600V/1000V/1000V

Commercial data

<input type="checkbox"/> Order No	306981
-----------------------------------	--------

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China


Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336

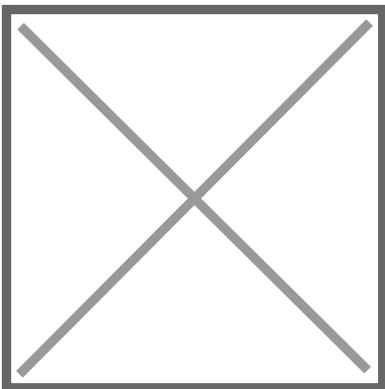

Date:2026-04-30 00:26

The right to modify data belongs to SUPU.