


Product Type: Screw terminal

## Product Name:306981

Product Description: Connection method:Screw connection,IEC Rated current:41A,IEC Rated Voltage:2000V,Number of connections:2,Number of levels : 1,Rated cross section:26-8AWG

### Product Size

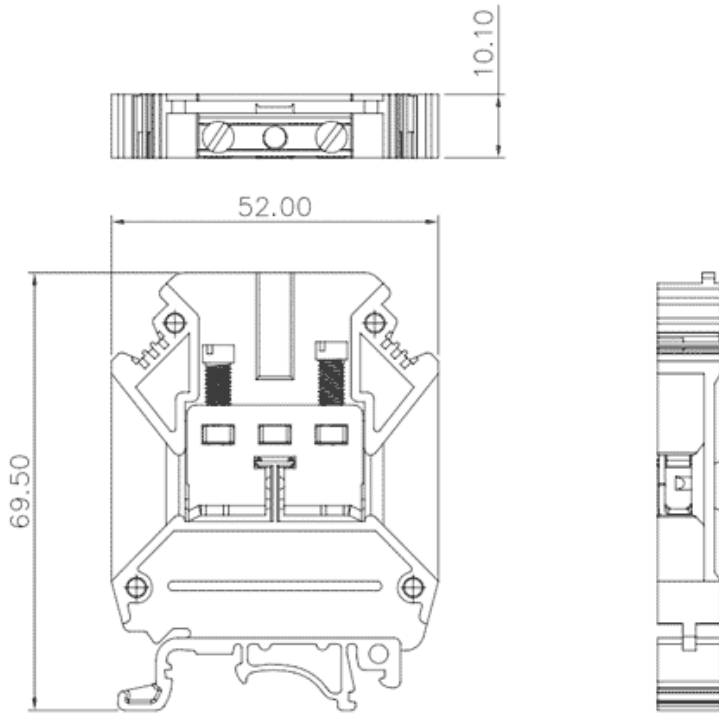

### Parameters

☞ SUPU ID	306981
☞ Width	10.1mm
☞ Number of levels	1
☞ Number of connections	2

☞ Connection method	Screw connection
☞ Protection Level	IP20
☞ Insulation material	PA66
☞ Insulation material group	I
☞ Contact material	Copper alloy
☞ Contact plating	Ni,Plated
☞ Ambient temperature (operation)	-40°C~105°C
☞ Ambient temperature (assembly)	-5°C~70°C
☞ Ambient temperature (storage)	-25°C~60°C
☞ Permissible humidity (storage/transport)	30%~70%
☞ Product type	Terminal block of side-entry

## Technical data

☞ IEC Rated Current	41A
☞ IEC Rated Voltage	2000V
☞ Overvoltage category	III
☞ Degree of pollution	3
☞ Rated impulse voltage	12KV
☞ UL Rated Current	50A/50A/50A/50A
☞ UL Rated Voltage	600V/600V/1000V/1000V
☞ Conductor cross section rigid	0.5-10mm <sup>2</sup>
☞ Conductor cross section flexible	0.5-6mm <sup>2</sup>
☞ Conductor cross section flexible,with furrule	0.5-6mm <sup>2</sup>
☞ Locking screw Specification	M4

☞ Locking screw torque	1.5N·m
☞ Fixed Screw Specification	/
☞ 固定螺钉扭矩	/
☞ Stripping length	15mm
☞ Use group	B/C/E/F
☞ Rated cross section	26-8AWG
☞ UL Rated Current	50A/50A/50A/50A
☞ UL Rated Current	600V/600V/1000V/1000V

## Commercial data

☞ Order No	306981
------------	--------

### Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



---

Date:2026-05-04 12:14

The right to modify data belongs to SUPU.