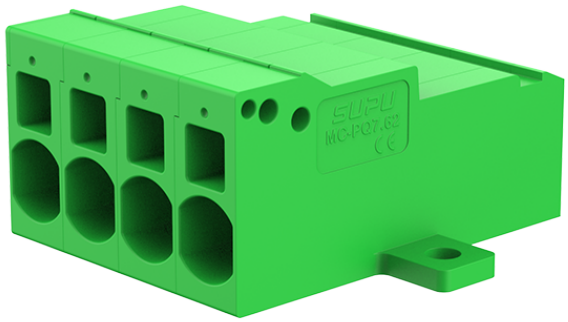

Product Type: Plug-in terminal-Socket

Product Name:MC-PQ7.62H16P-B-0001

Product Description: Pitch:7.62mm Rated Voltage：1000V Rated Current:41A Connection method：Push-in spring connection colour：customizable

Product Size

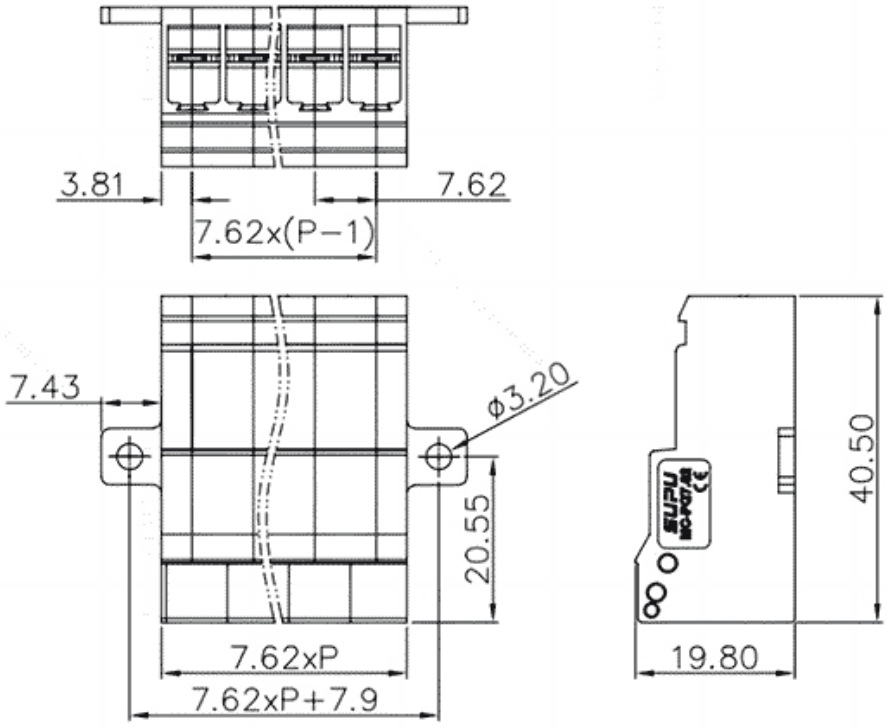

Parameters

SUPU ID	MC-PQ7.62H16P-B-0001
Pitch	7.62
Number of connections	16
Connection method	Push in connection

Protection Level	IP20
Operating temperature range	-40~+105°C
Insulation material	PA66
Insulation material group	I
Contact material	Copper alloy
Contact plating	Sn,Plated
Color	Green/Black/Blue/Grey/Orange/Red

Technical data

IEC Rated Current	1000V
IEC Rated Voltage	41A
Overvoltage category	III/III/ II
Degree of pollution	3 2 2
Rated impulse voltage	8.0KV 8.0KV 8.0KV
UL Rated Current	35A - 35A
UL Rated Voltage	600V - 600V
Conductor cross section rigid	0.2~10.0mm²
Conductor cross section flexible	0.2~10.0mm²
Conductor cross section flexible,with furrule	0.2~6.0mm²
Locking screw Specification	-
Locking screw torque	-
Fixed Screw Specification	-
Stripping length	13~15mm
Use group	B/C/D

Commercial data

Order No	MC-PQ7.62H16P-B-0001

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336

Wechat

The right to modify data belongs to SUPU.