

Product Type: Plug-in terminal-Plug


Product Name:MC-RE3.5V20C-I-0001

Product Description: Pitch:3.5mm Rated

Voltage : 160V Rated Current:8A Connection

method : Screw connection colour : customizable

Product Size

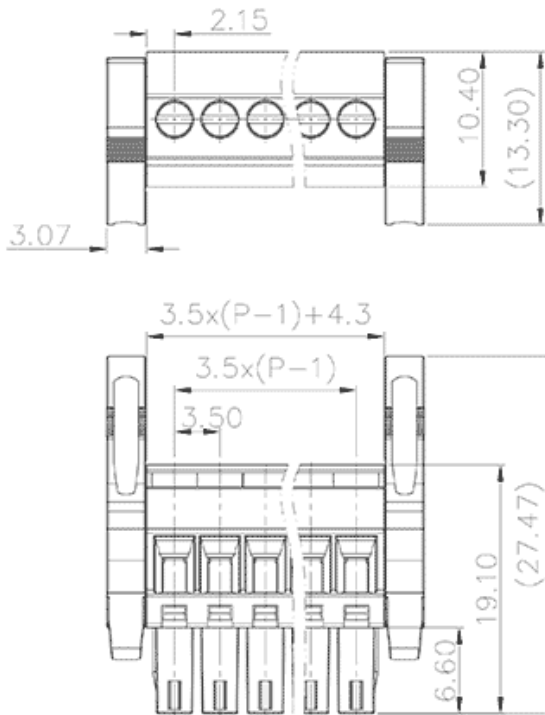

Parameters

| | |
|-------------------------|---------------------|
| ⌘ SUPU ID | MC-RE3.5V20C-I-0001 |
| ⌘ Pitch | 3.5 |
| ⌘ Number of levels | single layer |
| ⌘ Number of connections | 20 |

| | |
|-----------------------------|----------------------------------|
| Connection method | Screw connection |
| Protection Level | IP20 |
| Operating temperature range | -40~+105°C |
| Insulation material | PA66 |
| Insulation material group | I |
| Contact material | Copper alloy |
| Contact plating | Sn,Plated |
| Color | Green/Black/Blue/Grey/Orange/Red |

Technical data

| | |
|---|------------------------|
| IEC Rated Current | 8A |
| IEC Rated Voltage | 160V |
| Overvoltage category | III/III/ II |
| Degree of pollution | 3 2 2 |
| Rated impulse voltage | 2.5KV 2.5KV2.5KV |
| UL Rated Current | 8A - 8A |
| UL Rated Voltage | 300V - 300V |
| Conductor cross section rigid | 0.2-1.5mm ² |
| Conductor cross section flexible | 0.2-1.5mm ² |
| Conductor cross section flexible,with furrule | 0.2-1.5mm ² |
| Locking screw Specification | M2.0 |
| Locking screw torque | 0.2N.m |
| Fixed Screw Specification | - |
| 固定螺钉扭矩 | - |

| | |
|-----------------------|----------|
| ☞ Stripping length | 7~8mm |
| ☞ Use group | B/C/D |
| ☞ Rated cross section | 24~16AWG |

Commercial data

| | |
|------------|---------------------|
| ☞ Order No | MC-RE3.5V20C-I-0001 |
|------------|---------------------|

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat