


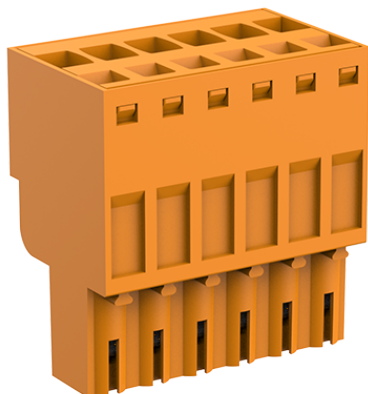

Product Type: Plug-in terminal-Plug

Product Name:MC-RJC3.5H05P-OG-WD


Product Description: Pitch:3.5mm Rated

Voltage : 160V Rated Current:10A Connection

method : Push in connection

colour : customizable

Product Size

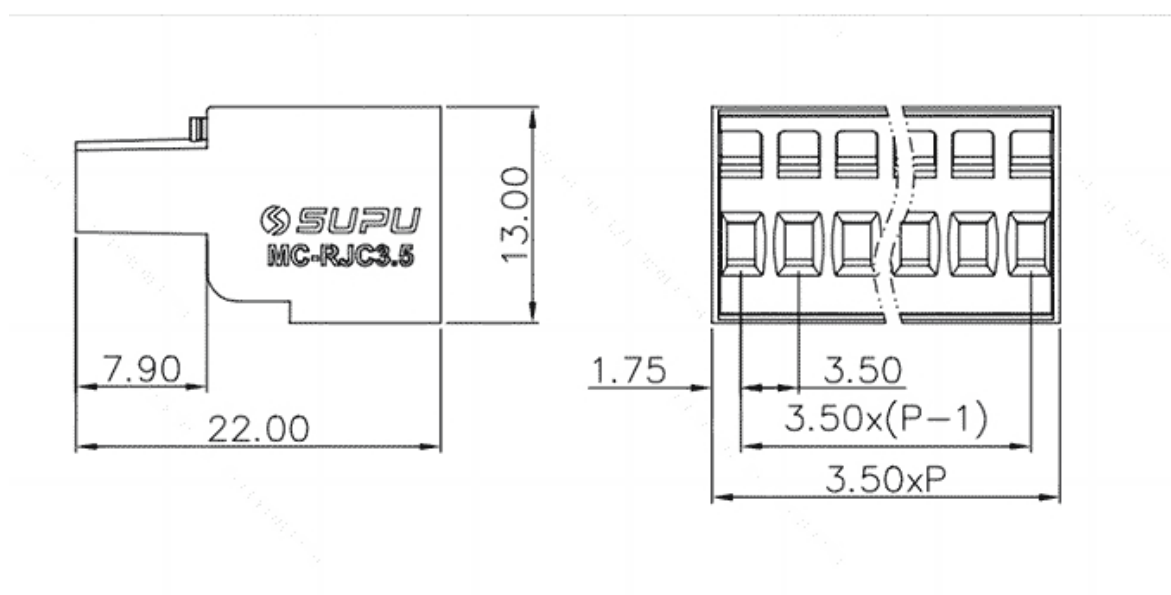

Parameters

SUPU ID	MC-RJC3.5H05P-OG-WD
Pitch	3.5
Number of levels	single layer
Number of connections	5

⌘ Connection method	Push in connection
⌘ Protection Level	IP20
⌘ Operating temperature range	-40~+105°C
⌘ Insulation material	PA66
⌘ Insulation material group	I
⌘ Contact material	Copper alloy
⌘ Contact plating	Sn,Plated
⌘ Color	Green/Black/Blue/Grey/Orange/Red

Technical data

⌘ IEC Rated Current	10A
⌘ IEC Rated Voltage	160V
⌘ Overvoltage category	III/III/ II
⌘ Degree of pollution	3 2 2
⌘ Rated impulse voltage	2.5KV 2.5KV 2.5KV
⌘ UL Rated Current	10A - 10A
⌘ UL Rated Voltage	300V - 300V
⌘ Conductor cross section rigid	0.2-1.5mm ²
⌘ Conductor cross section flexible	0.2-1.5mm ²
⌘ Stripping length	10-11mm
⌘ Use group	B/C/D
⌘ Rated cross section	28-16AWG

Commercial data

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat