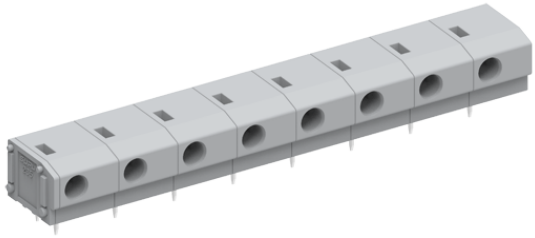

Product Type: Fixed terminal

# Product Name:235405

Product Description: Pitch:10mm Rated Voltage：1000V Rated Current:17.5A Connection method：Push-in spring connection colour：customizable

## Product Size

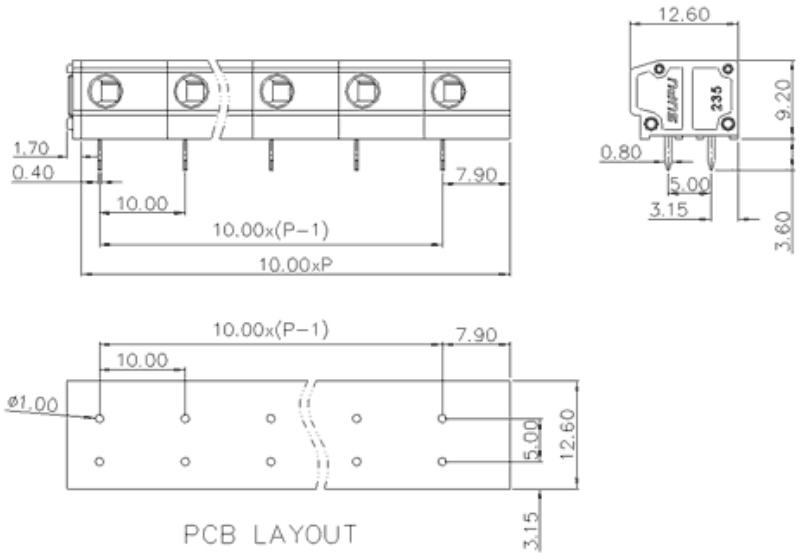


## Parameters

| | |
|---|---|
| SUPU ID | 235405 |
| Pitch | 10.0 |
| Number of levels | Single layer |
| Number of connections | 5 |

| | |
|---|---|
| Connection method | Push in connection |
| Protection Level | IP20 |
| Operating temperature range | -40~+105°C |
| Insulation material | PA66 |
| Insulation material group | I |
| Contact material | Copper alloy |
| Contact plating | Sn,Plated |
| Color | Green/Black/Blue/Grey/Orange/Red |

## Technical data

| | |
|---|---|
| IEC Rated Current | 17.5A |
| IEC Rated Voltage | 1000V |
| Overvoltage category | III/III/ II |
| Degree of pollution | 3 2 2 |
| Rated impulse voltage | 8.0KV 8.0KV 8.0KV |
| UL Rated Current | 10A - 10A |
| UL Rated Voltage | 300V - 300V |
| Conductor cross section rigid | 0.2-2.5mm² |
| Conductor cross section flexible | 0.2-2.5mm² |
| Conductor cross section flexible,with furrule | 0.2-2.5mm² |
| Locking screw Specification | - |
| Locking screw torque | - |
| Fixed Screw Specification | - |
| Stripping length | 9-10mm |

## Commercial data

| | |
|---|---|
| Order No | 235405 |


### Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336


Wechat




The right to modify data belongs to SUPU.